
空气呼吸器
Rebreather

应用 Applications

- 利用微孔过滤器的过滤原理，防止储罐因液位下降吸入空气时外部空气中尘埃粒子的进入，保证了罐内空气的洁净度。
- 壳体材料采用进口316L或304
- 内表面经抛光处理
- 表面粗糙度Ra≤0.2μm
- 通量: 0.75m³/min、1.5m³/min、3m³/min
- 接口方式: 卡箍式、法兰

- The principle is same as micro-filter's. It can prevent the outside particulates coming into the storage tank due to the liquid level descends. It ensures the air purity in the tank.
- Housing material: 316L/304
- Inner surface are polished
- Surface roughness: Ra≤0.2μm
- Capacity: 0.75m³/min, 1.5m³/min, 3m³/min
- Connection: Clamped, Flanged






NO.EHX111

规格 SIZE	ID	OD
1"	22.4	50.5
1.25"	35.1	50.5
1.5"	35.1	50.5
2"	47.8	64


过滤器+冷凝水排放阀 Filter+condensation water



NO.EGL121

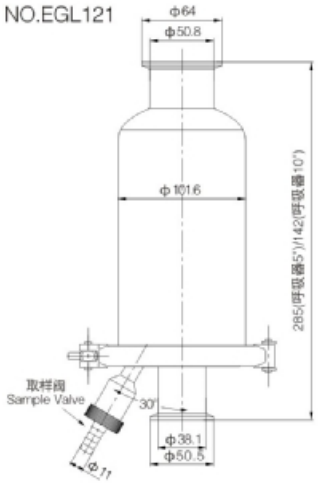

NO.EGL131

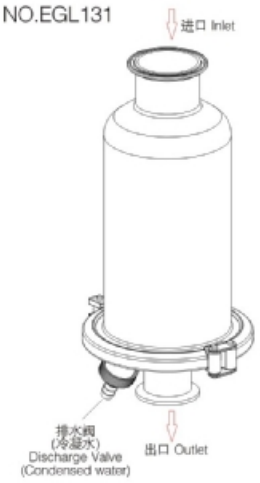

地漏 Fllor drainer


应用 Applications

该地漏适用于食品、改料，制药等卫生洁净车间。
全不锈钢制作，AISI304/316L
规格从1"-4",DN25-DN100
设计有网孔和污染头防止颗粒污料进入堵塞排泄管道
可取下盖子和污料斗清洗地漏防止细菌繁殖

The drainer is used in the hygienic workshops of food processing, pharmacy industries
Material:AISI304/316L
Size:1"-4",DN25-DN100
Metal meshes and hopper can keep dirty particulates from blocking pipeline
Cover and hopper can be cleaned to prevent bacteria from propagating



NO.EDL110



Size	A	D	D1
1"	80	25	130
1.5"	80	38	130
2"	100	51	195
2.5"	100	63	195
3"	130	76	230
4"	130	100	230