
无菌系列
Sterile series

罐体–无菌卡箍接头–压板 Can–body/Aspectic clamp ferrule/clamp plate

适用于Apply to：DIN 11853/DIN 11864–3；(OD=DIN 11866 DIN 11850)

代码Code：F020702-000-0101






SIZE		D	H	D1
DN10–DN15	0.5"–0.75"	75	8	36
DN20–DN32	1"	85	8	53
DN40	1.5"	100	8	66
DN50	2"	120	8	80
DN65	2.5"	135	10	93
DN80	3"	150	10	108
DN100	4"	170	10	132

罐体–卡箍接头–连接器 Can–body/aspetic sight glass/connector

适合用Apply to：DIN 32676&3A&BPE&ISO 卡箍接头 Clamp ferrule

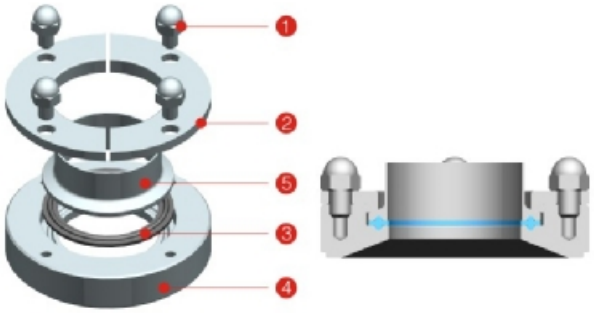


编号	名称	推荐材质 Recommend material	可选材质 Optional materail		
1#	螺栓 Bolt	304	NO		
2#	压板 Clamp plate	316L	304	1.4435	ASME BPE 316L
3#	垫圈 Gasket	EPDM	Silicon	Vitong	HNBR
4#	连接器 Connector	316L	304	1.4435	ASME BPE 316L
5#	卡箍接头 Clamp ferrule	316L	304	1.4435	ASME BPE 316L


注意：卡箍接头通用于，DIN32676&ASME BPE &BS4825–3& ISO2852；该标准就是常规通用的卡箍接头，长度可以根据客户要求，一般建议用28.6mm长度；
Notice:Clamp ferrule is suitale for DIN32676&ASME BPE & BS4825–3&ISO2852,the standard is common clamp ferrule, the length could be customized according to client's requirement, general recommend 28.6mm length

罐体–卡箍接头–连接器 Can–body/aspetic sight glass/connector

适用于Apply to：ASME BPE/3A/ BS2825–3/ ISO2852；(OD=ASME BPE; 3A; ISO; BS)

代码Code：F040732-000-0100





SIZE	D	L
1"	85	25
1.5"	85	25
2"	100	25
2.5"	120	27
3"	135	27
4"	160	27