
无菌–法兰–过滤器 Aspetic flange filter

适用于Apply to：ASME BPE ISO 3A 等标准 ASME BPE ISO 3A standard


货号代码Code：3A-EGL620

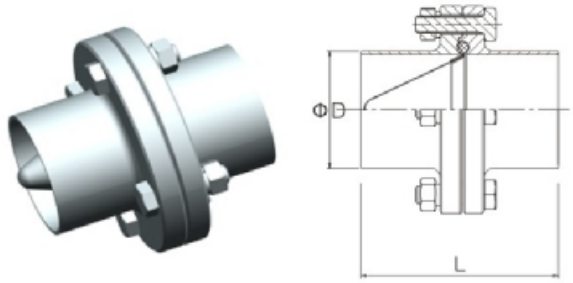

SIZE	D	L
1/2"	12.7	80.0
3/4"	19.1	80.0
1"	25.4	80.0
1.5"	38.1	90.0
2"	50.8	90.0
2.5"	63.5	108.0
3"	76.2	112.0
4"	101.6	116.0

无菌卡箍由任–过滤器 Aspetic clamp ferrule filter

适合用Apply to：DIN 32676&3A&BPE&ISO 卡箍接头 Clamp ferrule

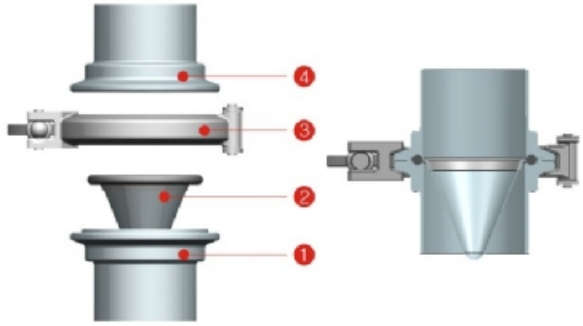


编号	名称	推荐材质 Recommend material	可选材质 Optional materail		
1#	凸法兰 Convex flange	316L	304	1.4435	ASME BPE 316L
2#	过滤网 Filter screen	316L	304		
3#	卡箍 Clamped	304	316L	NO	
4#	凹法兰 Concave flange	316L	304	1.4435	ASME BPE 316L

注意：1)由任通用于DIN11864–1(OD尺寸可根据客户要求选择，如DIN &ASMEBPE&inch等)；2)滤芯可根据客户选择 100目到300目，推荐为100目。
Notice: 1) Union is use for DIN11864–1 (OD size can be selected according to customer requirements, such as DIN & ASME BPE & INCH, etc .; 2) filter element 100 mesh to 300 mesh can be selected according to customer, recommended for 100 mesh)

无菌卡箍由任–过滤器 Aspetic clamp ferrule filter

适用于Apply to：DIN 标准 Standard

货号代码Code：DIN-EGL630

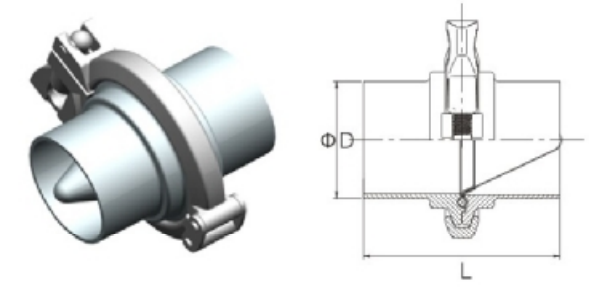

SIZE	D	L
DN10	13.0	76.0
DN15	19.0	76.0
DN20	23.0	76.0
DN25	29.0	77.0
DN32	35.0	88.0
DN40	41.0	88.0
DN50	53.0	89.0
DN65	70.0	113.0
DN80	85.0	117.0
DN100	104.0	120.0