




TU/STU 系列转子泵
TU/STU series lobe pump

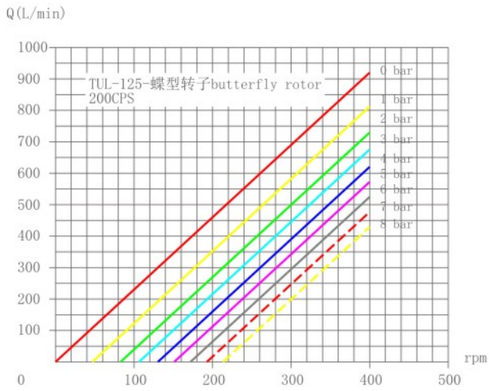

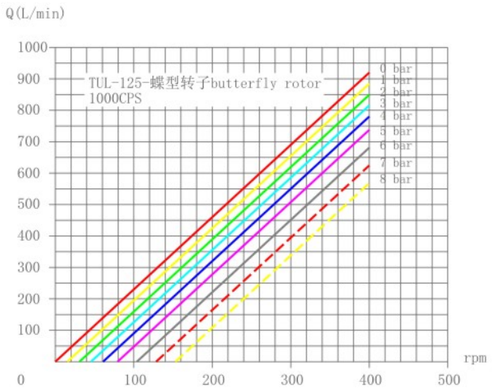

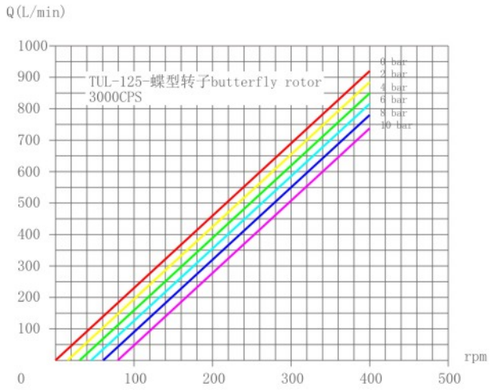

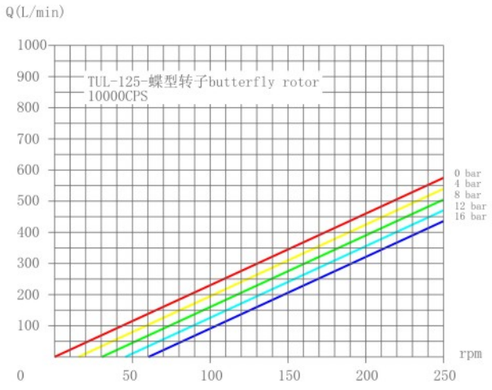

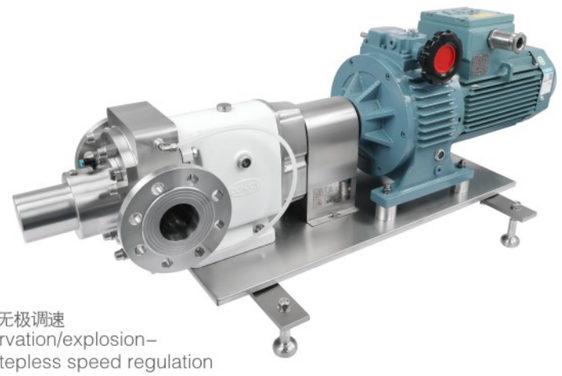

内置安全/保温/隔爆电机/机械无极调速
Built-in safety/heat preservation/explosion-proof motor/mechanical stepless speed regulation


LG 系列双螺杆泵
LG series twin screw pump

双向可逆运行、高低粘度、无脉冲、高压、
含颗粒等各种物料无破损柔性输送的解决方案
Bidirectional reversible operation, high and low viscosity, no pulse, high pressure, Solutions for non-damaged and flexible conveying of various materials including granule

高效、洁净、安全、耐用
维护简单、无需专业人员
Efficient, clean, safe and durable
Simple maintenance, no professional required

技术参数 Technical Specifications

最大流量 Max flow	180m³/h
最大颗粒 Max particles	39mm
最高压力 Max pressure	20bar
转速范围 Speed range	10-3500 R.P.M
工作温度 Working temperature	-40℃ to 150℃
表面处理 Surface treatment	Ra≤0.6μm；EP=Ra0.4μm
材质 Material	100%不锈钢，介质接触部分316L 100% stainless steel, Medium contact part 316L
认证 Certification	3-A-02-12 No.1759; FDA 177.2600; CE-MD/06-42 No .705201402401-00

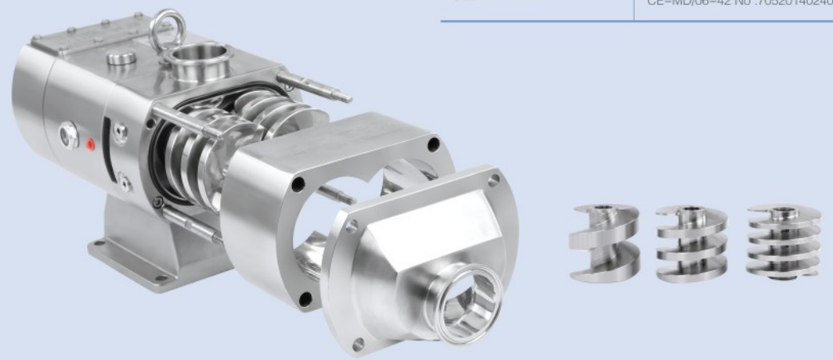

LG螺杆泵技术参数表 LG Screw Pump Technical Parameter Table

型号 Model	螺杆间距 Screw pitch (mm)	每转排量(L/r) Discharge per revolution	最大流量 Max flow (L/m)	最大流量 Max flow (m³/h)	最高转速 (rpm) Max speed (minutes)	可通过粒径 Max diameter of passed granule (mm)	最大压力 Max pressure (bar)	泵头进口 Head port (inlet)	泵体出口 Body port (outlet)	重量 Net weight (kg)
LGR-20-18	18	0.07	252	15	3600	8.5	20	1"-2"	1"-2"	30
LGR-20-26	26	0.10	360	22	3600	12.5	20			
LGR-20-39	39	0.15	435	26	2900	19.0	20			
LGR-30-24	24	0.14	406	24	2900	11.5	20	2.5"-3"	2"-3"	59
LGR-30-40	40	0.25	725	44	2900	19.5	20			
LGR-30-60	60	0.37	1073	64	2900	29.5	20			
LGR-70-32	32	0.47	1363	82	2900	15.5	20	3"-4"	3"-4"	155
LGR-70-54	54	0.79	2291	137	2900	26.5	20			
LGR-70-80	80	1.17	3393	204	2900	39.5	20			