
双头双螺杆泵
Double head twin screw pump







S-LG系列螺杆泵
更高流量、更高压力、双吸入口、多任务处理、多功能
双向可逆运行、高低粘度、无脉冲、含颗粒等各种物料无破损柔性输送的解决方案

S-LG series screw pump
Higher flow, higher pressure, double suction inlet, multi-task processing,
multi-function bidirectional reversible operation, high and low viscosity, no pulse, containing
granule and other materials without damage and flexible transportation solutions

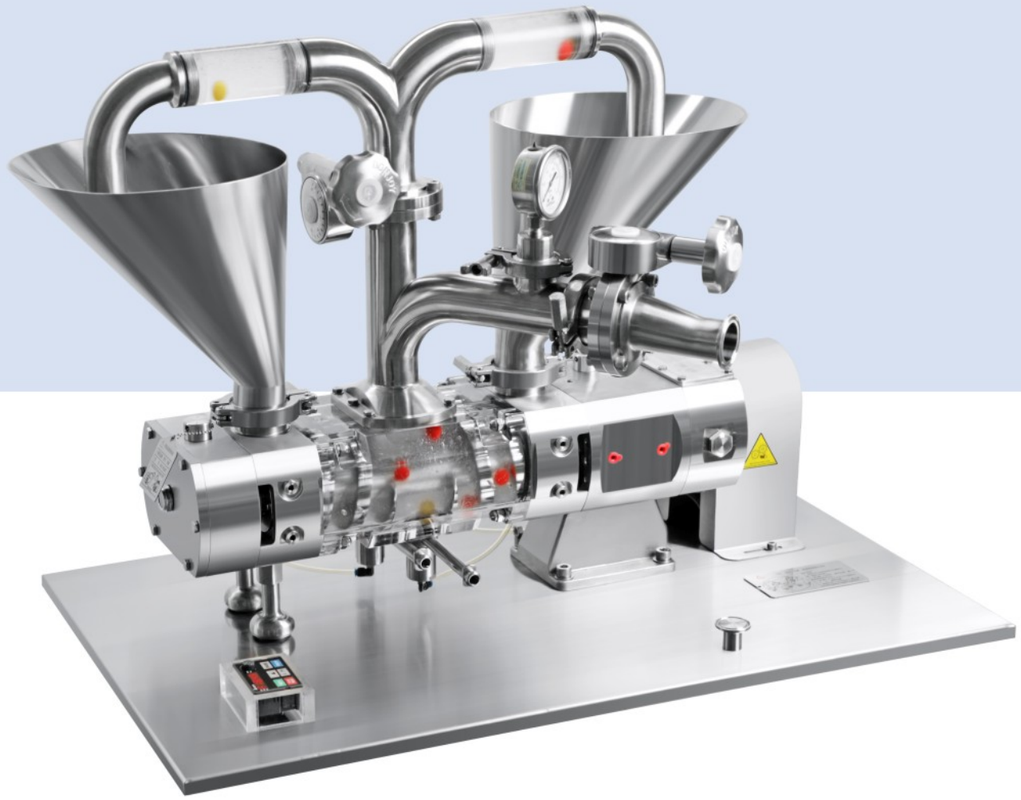

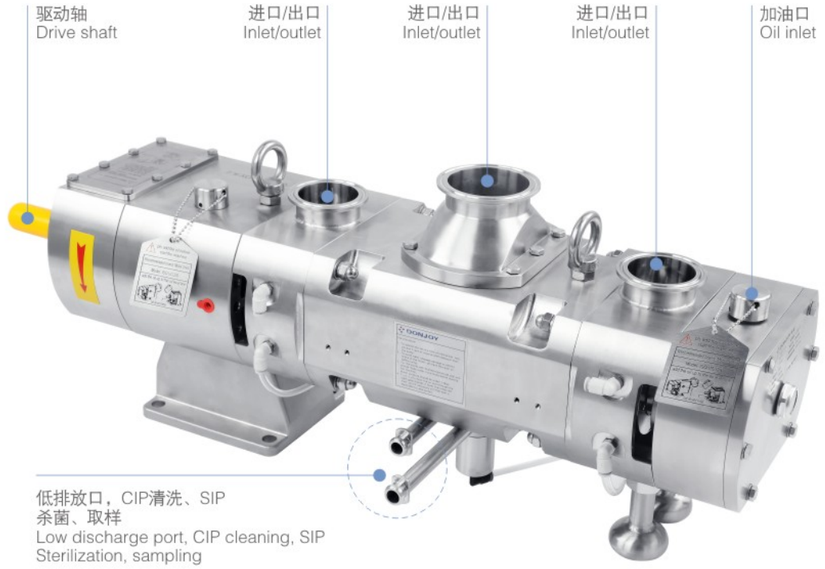

低排放口，CIP清洗、SIP
杀菌、取样
Low discharge port, CIP cleaning, SIP
Sterilization, sampling





SLGR螺杆泵技术参数表 Technical Parameter Table of Screw Pump

型号 Model	螺杆间距 Screw pitch (mm)	每转排量 Discharge per revolution (L/Rev)	最大流量 Max flow (L/m)	最大流量 Max flow (m^3/h)	最高转速 (rpm) Max speed (minutes)	可通过粒径 Max diameter of passed granule (mm)	最大压力 Max pressure (bar)	泵头进口 Head port (inlet)	泵体出口 Body port (outlet)	重量 Net weight (kg)
SLGR-20-18	18	0.14	280	17	2000	8.5	20	2.5"-DN65	2"-DN50	55
SLGR-20-26	26	0.20	400	24	2000	12.5	20			
SLGR-20-39	39	0.30	600	36	2000	19.0	20			