
RX 系列柔性叶轮泵
RX series flexible impeller pump



系列 Model	电机功率 Power	泵头规格 Pump Dimension		外形安装尺寸 Assembly Dimension								
		进口/出口 Inlet/Outlet	PB	E	L	L1	L2	H	H1	H2	W	A
DJ-RX-04	1.5KW(2P)	1"/DN25	100	31	484	119	240	362	189	94.8	260	140
DJ-RX-04	0.75KW(4P)	1"/DN25	100	31	459	113	240	337	179		240	125
DJ-RX-04	0.55KW(6P)	1"/DN25	100	31	459	113	240	337	179		240	125
DJ-RX-10	3.0KW(2P)	1.5"/DN40	138	42	554	149	300	409	199		320	160
DJ-RX-10	1.5KW(4P)	1.5"/DN40	138	42	521	155.5	240	362	189		260	140
DJ-RX-10	0.75KW(6P)	1.5"/DN40	138	42	572	155.5	240	362	189		260	140
DJ-RX-20	4KW(4P)	2"/DN50	180	50	662	173	300	411	211		330	190
DJ-RX-20	3KW(6P)	2"/DN50	180	50	683	203.5	330	468	231		380	216



移动式-柔性叶轮泵
Mobile-Flexible Impeller Pump

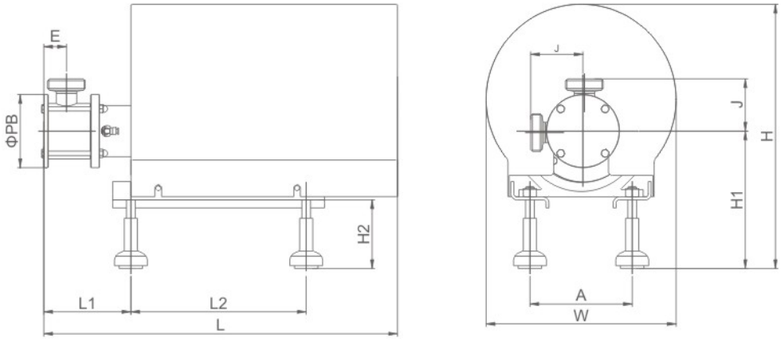


移动式+控制箱-柔性叶轮泵
Mobile+Control Box-Flexible Impeller Pump

离心泵系列
Centrifugal pump series

每一款泵的设计是基于——美国卫生标准《3A-02-12》，欧盟安全指令《MD/06/42/EC》
国际领先合作伙伴——西门子、ABB、SEW、皖南，Roplan，确保每一款泵更加的，经久耐用、高效、洁净、安全

The design of each pump is based on – US Sanitary Standard "3A-02-12", EU Safety Directive Design "MD/06/42/EC"
International leading partners – Siemens, ABB, SEW, WH, Roplan, to ensure that each pump is more durable, efficient, clean and safe

高效率、低噪音、
维护简单经济、高洁净的离心泵系列
Solution for high efficiency, low noise, simple and economical maintenance, high pruity

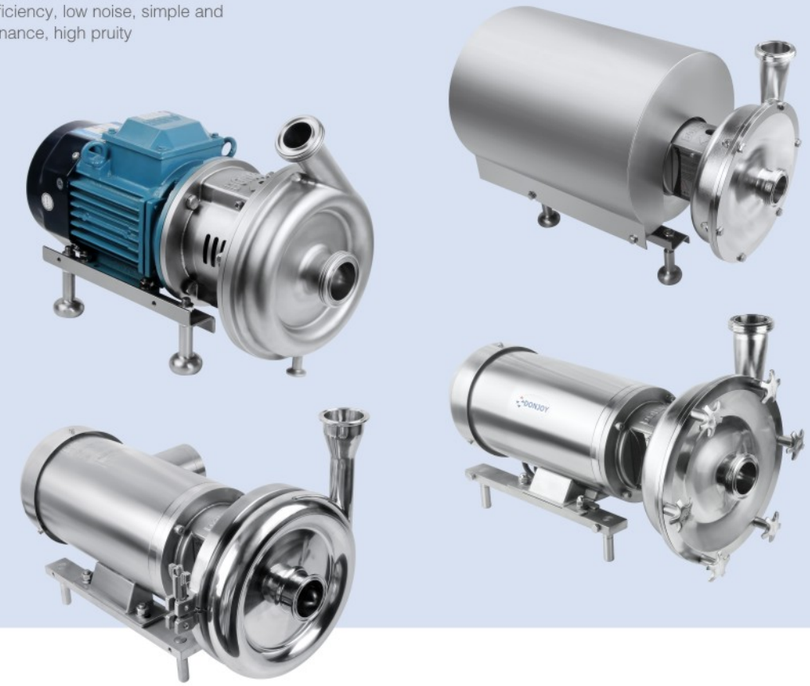

技术参数 Technical Specifications

流量 Flow	0.5m³/h-120m³/h
扬程 Head	70M
温度 Temperature	-20℃到140℃ From -20℃ to 140℃
功率 Power	0.55KW-30KW
材质 Material	304 /316L, 1.4301/1.4404, ASME BPE 316L, 1.4435 BN2 Fe≤0.5%　双相钢 Dual-phase steel 2205，哈氏合金 Hastelloy alloy C276
表面处理 Surface treatment	≤ Ra0.8 μ m, ≤ Ra0.6 μ m, EP≤ Ra0.4 μ m
机封 Mechanical seal	单机封、双机封，详见配置单 Single mechanical seal, double mechanical seal, details see configuration table
进/出口连接 Inlet/Outlet Connection	螺纹、卡箍、法兰、无菌法兰 Thread, Clamp, Flange, Aseptic flange
认证 Certification	3-A-02-12(N.O.1579); MD/06/42-EC(N.O.70521616101-00); FDA 177.2600; USP CLASS-II; EG/VO1935/2004