
DJ-BS 系列离心泵
DJ-BS series centrifugal pump







BS-4(Q-H曲线图graph)

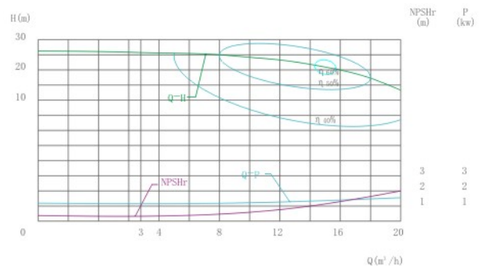


BS-6(Q-H曲线图graph)

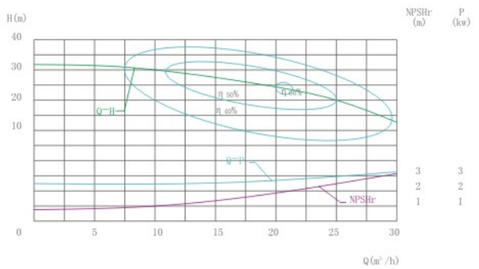

BS-10(Q-H曲线图graph)

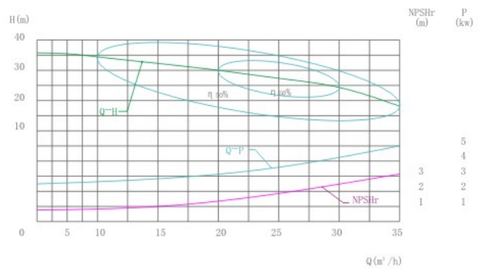

BS-12(Q-H曲线图graph)

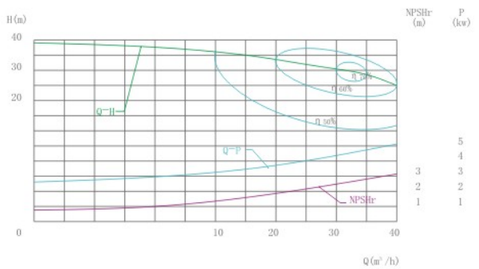


DJ-DLX 系列多级离心泵
DJ-DLX serise multi-stage centrifual pump

高效率、低噪音、高扬程、
维护简单经济、高洁净的解决方案
Solution for high efficiency, Low noise, High head, simple and economical maintenance, High purity

DLX系列离心泵是一款卧式多级开式叶轮的离心泵，它具有卫生、高效率、最高扬程可达210m(21bar)，输送介质柔和且卫生。主要应用于食品和饮料、乳品、啤酒厂碳酸化工艺、CIP 进料、制药工业、纯水泵送(WFI注射水)、生物技术生产、输注(营养液、乙醇)充填站、个人护理、肥皂、护肤霜、洗剂工业、净化处理(CIP 系统)、水技术工艺、半导体生产、金属表面处理等。

DLX series centrifugal pump is a horizontal multi-stage open impeller centrifugal pump, it is hygienic, efficient, the highest head can reach 210m (21bar), and it can convey the medium softly. Mainly used in food and beverage, dairy, brewery carbonation process, CIP feed, pharmaceutical industry, pure water pumping (WFI water for injection), biotech production, infusion (nutrient solution, ethanol) filling stations, personal care, Soap, skin cream, lotion industry, purification process (CIP system), water technology process, semiconductor production, metal surface treatment, etc.

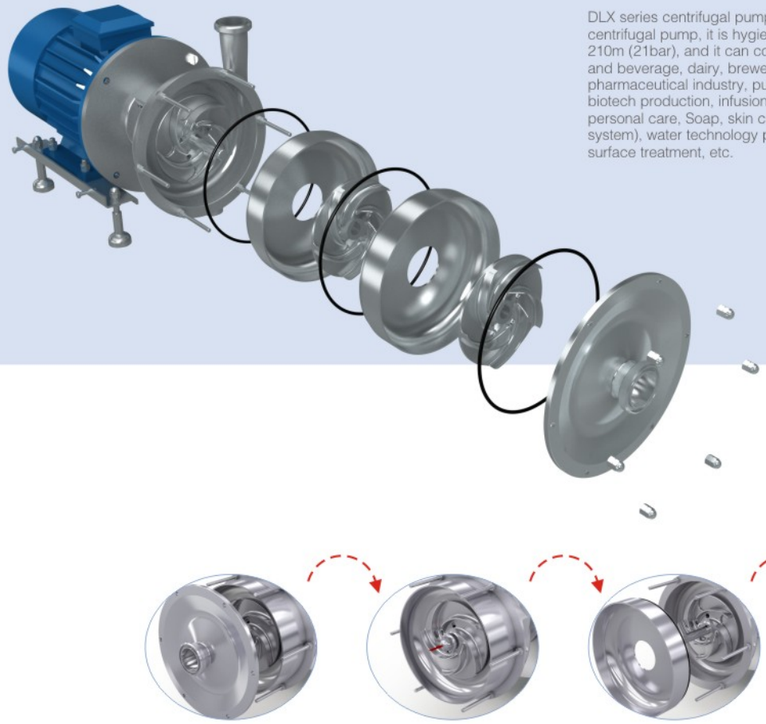

技术参数 Technical Specifications

最大流量 Max flow	50m³/h
最高扬程 Max head	210M
最高温度 Max temperature	-10℃-140℃
材质 Material	304 /316L, 1.431/1.4404, ASME BPE 316L, 1.4435 NB2 Fe≤0.5%　双相钢 Dual-phase steel 2205，哈氏合金 Hastelloy alloy C276
表面处理 Surface treatment	≤ Ra0.8μm，≤ Ra0.6μm，≤ Ra0.4μm
机封 Machine seal	单机封、双机封 Single seal, double seal
机封配置 Machine seal configuration	详见机封配置表 See mechanical seal configuration table
进/出口连接 Inlet/Outlet connection	螺纹、卡箍、法兰、无菌法兰 Threads, clamps, flanges, aseptic flanges
认证 Certified	3-A-02-12(N.O.1579); MD/06/42-EC (N.O.70521616101-00); FDA 177.2600; USP CLASS-II; EG/VO1935/2004