
DJ-ZLX 系列自吸式离心泵
DJ-ZLX series self-priming centrifugal pump


高效率、低噪音、CIP回程、
物料输送、高洁净解决方案
Solution for high efficiency, low noise, CIP backhaul, material conveying, high purity

ZLX 系列是一款自吸式离心泵，它可以在CIP系统中作为自吸回流循环泵，也可作为离心泵适用，输送物料最高粘度500CP.S(mPas)。该泵具有效率高、噪音低、高洁净、过液体部件易清洗等技术优势。

The ZLX series is a self-priming centrifugal pump. It can be used as a self-priming return circulation pump in a CIP system or as a centrifugal pump. The maximum viscosity of the conveyed material is 500CP.S (mPas). The pump has the technical advantages of high efficiency, low noise, high cleanliness, and easy cleaning of wetted parts



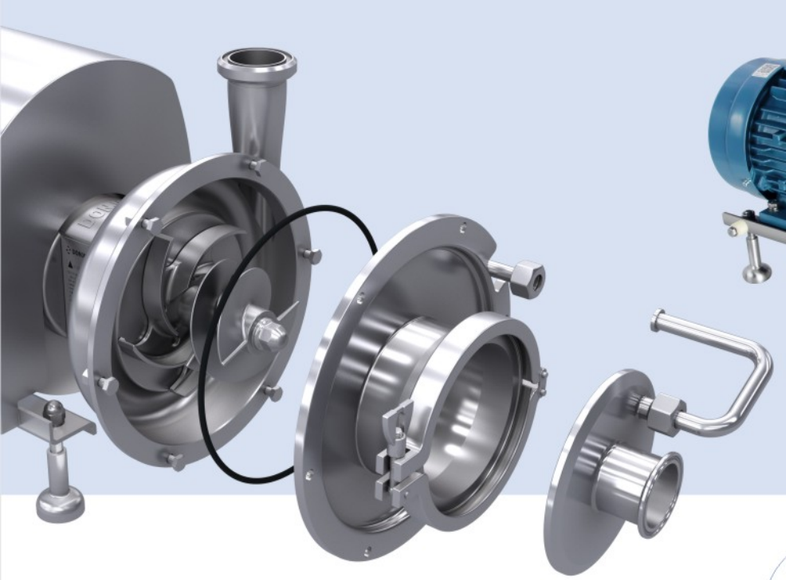

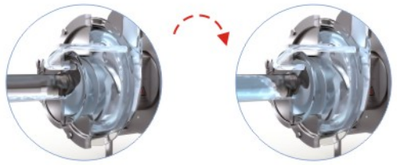

技术参数 Technical Specifications

最大流量 Max Flow	70m³/h
最高扬程 Max Head	70M
温度 Temperature	-20℃ 到 150℃ / -20℃ to 150℃
材质 Material	304 /316L, 1.431/1.4404, ASME BPE 316L, 1.4435 NB2 Fe≤0.5%　双相钢 Dual-phase steel 2205，哈氏合金 Hastelloy alloy C276
表面处理 Surface treatment	≤ Ra0.8μm，≤ Ra0.6μm，≤ Ra0.4μm
机封 Mechanical seal	单机封、双机封，详见配置单 Single mechanical seal, double mechanical seal, details see configuration table
进/出 口连接 Inlet/Outlet	螺纹、卡箍、法兰、无菌法兰， Thread, clamp, flange, Aseptic flange
认证 Certification	3-A-02-12(N.O.1579); MD/06/42-EC (N.O.70521616101-00); FDA 177.2600; USP CLASS-II; EG/VO1935/2004



ZLX 自吸式离心泵选型表 Self-priming centrifugal pump selection table

型号 Model	功率 Power	流量 Flow(m³/h)	扬程 Head(M)	进口/出口 Inlet&outlet	重量 Weight(KG)
ZLX-15	1.5KW	3	25	2"/1.5"	42
	1.5KW	5	25		42
	1.5KW	8	22		42
	2.2KW				42
	2.2KW	10	20		42
	2.2KW	15	19		42
	2.2KW	18	15		42
	3.0KW				54
	2.2KW	20	13		45
	3.0KW				54
ZLX-20-1	3.0KW	5	32	2.5"/2"	60
	3.0KW	10	32		60
	4.0KW				64
	4.0KW	15	31		64
	4.0KW	20	29		64
	4.0KW	25	26		64
	5.5KW				82
	5.5KW	30	26		82
	5.5KW	38	18		82
ZLX20-2	5.5KW	20	36	2.5"/2"	86
	5.5KW	25	33		86
	5.5KW	30	32		86
	5.5KW	36	28		86
	7.5KW	40	26		90
	7.5KW	45	24		90
ZLX-25	4.0KW	5	46	2.5"/1.5"	70
	5.5KW	10	45		88
	5.5KW	15	44		88
	5.5KW	20	40		88
ZLX-30	5.5KW	10	54	2.5"/1.5"	93
	5.5KW	15	50		93
	5.5KW	20	47		93
	7.5KW				97
	7.5KW	25	42		97
	7.5KW	30	36		97
ZLX-35-1	11KW	10	66	3"/1.5"	159
	11KW	15	61		159
	11KW	20	61		159
	11KW	25	56		159
	11KW	30	56		159
	11KW	35	51		159
	15KW	40	46		172
	15KW	45	46		172
	15KW	50	41		172
ZLX-35-2	15KW	20	64	3"/1.5"	172
	15KW	25	62		172
	15KW	30	62		172
	15KW	35	61		172
	15KW	40	59		172
	18.5KW	45	56		180
	18.5KW	50	51		180