
PMLG 系列混合泵
PMLG series mixing pump



乳化、均质、
细化、混合、可调节、多任务、
粉液混合的解决方案

Solution for emulsification, homogenization, refining, mixing, adjustable, multi-tasking, mixing powder and liquid



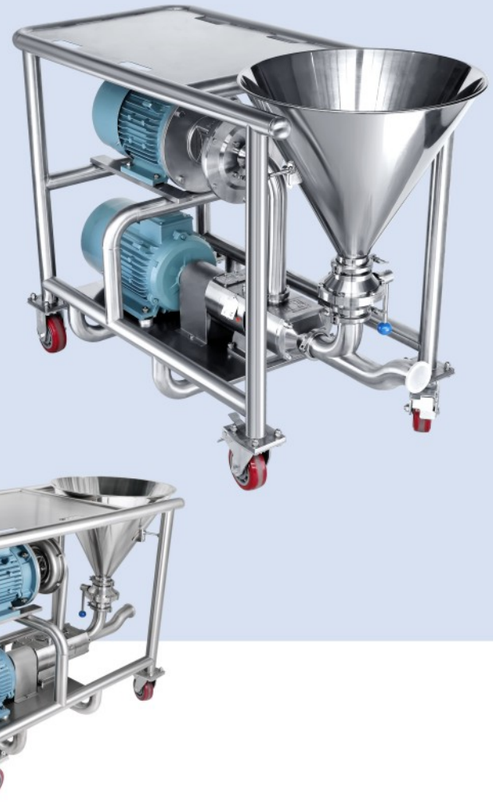

PMLG21 混合泵选型表 Mixing pump selection table

均质混合泵 Homogeneous mixing pump 型号 Model	混合物料流量 Mixed material flow (m^3/h)	转子泵-电机减速机 Lobe pump 型号 Model	功率 Power (KW)	乳化均质泵Emulsifying homogenizing pump 转速 Speed (2950-MIN) 型号 Model	功率 Power (KW)	粉体处理量 Powder capacity-kg/h 砂糖类 Granulated sugar	脱脂牛奶蛋白粉类 Skim milk protein powder	增稠剂粉末 Thickener powder (base on grade & density)	进口 Inlet	出口 Outlet	加料斗容量 Hopper capacity (L)	设备总功率 Power (KW)	适用粘度 (CP.S)
DJ-PMLG21-13	4	LGR-20-18	1.5	JZ1-130	5.5	0-500	0-450	100-200	2"	1.5"-DN40	50 L	7	≤2000
DJ-PMLG21-15	6	LGR-20-39	1.5	JZ1-150	11	0-1000	0-900	200-400	3"	2"-DN50	50 L	12.5	≤2000
DJ-PMLG21-17	7.5	LGR-30-40	3.0	JZ1-170	18.5	0-1800	0-1600	300-500	3"	2"-DN50	50 L	21.5	≤2000
DJ-PMLG21-19	12.5	LGR-30-60	4.0	JZ1-190	30	0-3500	0-3200	600-1200	4"	2"-2.5" DN50-65	85 L	34	≤2000

PMZX 系列混合泵
PMZX series mixing pump





乳化、均质、
细化、混合、可调节、多任务、
粉液混合的解决方案

Solution for emulsification, homogenization, refining, mixing, adjustable, multi-tasking, mixing powder and liquid





PMZX 混合泵选型表 Mixing pump selection table

均质混合泵 Homogeneous mixing pump 型号 Model	混合物料流量 Mixed material flow (m^3/h)	自吸泵-电机 Self-priming pump /motor 型号 Model	功率 Power (KW)	乳化均质泵Emulsifying homogenizing pump 转速 Speed (2950-MIN) 型号 Model	功率 Power (KW)	粉体处理量 Powder capacity-kg/h 砂糖类 Granulated sugar	脱脂牛奶蛋白粉类 Skim milk protein powder	增稠剂粉末 Thickener powder (base on grade & density)	进口 Inlet	出口 Outlet	加料斗容量 Hopper capacity (L)	设备总功率 Power (KW)	适用粘度 (CP.S)
DJ-PMZX-13	8	CIPU-10	5.5	JZ1-130	5.5	500	450	100-300	2.5"	1.5"-DN40	45 L	11	≤500
DJ-PMZX-15	12	CIPU-10	5.5	JZ1-150	11	1000	900	300-500	2.5"	2"-DN50	45 L	16.5	≤500
DJ-PMZX-17	15	CIPU-20	7.5	JZ1-170	18.5	1800	1600	500-800	2.5"	2"-DN50	45 L	26	≤500
DJ-PMZX-19	25	CIPU-20	7.5	JZ1-190	30	3500	3200	800-1500	3"	2"-2.5" DN50-65	65 L	37.5	≤500
DJ-PMZX-21	35	CIPU-30	11	JZ1-210	37	6000	4500	1500-3000	3"	3" DN65-DN80	65 L	48	≤500