
隔膜阀
Diaphragm valve

技术特点


- 规格：1/4"–4",DN6–DN100
- 材质：316L/1.4404，ASME BPE 316L 1.4435 NB2 Fe≤ 0.5%
- 压力：真空 ~10bar(1.0 Mpa)
- 温度：–20℃ 到 +150℃，取决密封于材质
- 密封：EPDM SILICON FKM FFKM HNBR NBR EPDM+PTFE
- 连接标准：DIN SMS ISO IDF RJT BS4825 ASME BPE 3A DIN11864 DIN11853
- 连接方式：螺纹、卡箍、焊接、法兰
- 驱动方式：手动、气动、电动
- 粗糙度：Ra≤0.6μm；MP=Ra≤0.3μm；EP=Ra≤0.3μm
- 认证：FDA 177.2600; 3A–18–03; Glass II USP Glass VI Chapter 88; GB4806.11; EG VO/1935–2004; PED/97/23/EC。


Technical Features

- Size: 1/4"–4",DN6–DN100
- Material: 316L/1.4404, ASME BPE 316L 1.4435 NB2 Fe≤ 0.5%
- Pressure: vacuum to 10bar (1.0 Mpa)
- Temperature: –20℃ to +150℃, Depending on the seal material
- Seal: EPDM SILICON FKM FFKM HNBR NBR EPDM+PTFE
- Connection standard: DIN SMS ISO IDF RJT BS4825 ASME BPE 3A DIN11864 DIN11853
- Connection way: threaded, clamp, welding, flange
- Drive mode: manual, pneumatic, electric
- Roughness: Ra≤0.6μm; MP=Ra≤0.3μm; EP=Ra≤0.3μm
- Certification: FDA 177.2600; 3A–18–03; Glass II USP Glass VI Chapter 88; GB4806.11; EG VO/1935–2004; PED/97/23/EC.

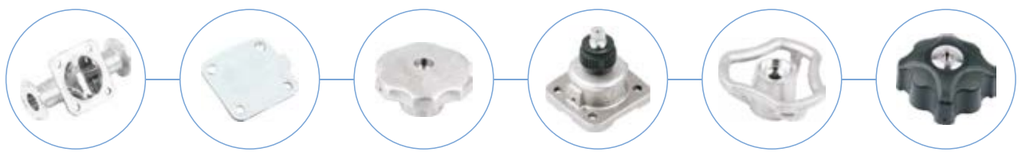

隔膜阀流量/选择(开度f)图表 Diaphragm valve flow /choose (open degree f) chart

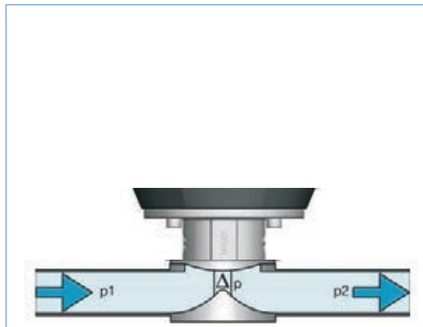

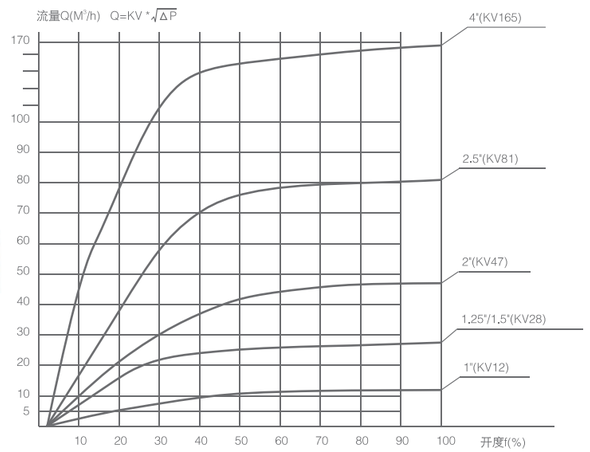

注意：上面图表适用于，
介质：水(20℃)
Note: the above chart suitable for,
medium: water (20 ℃)

注意：开关量KV曲线仅供参考，100%开度为精确KV值 Note: On–off KV curve for reference, 100% open is accurate KV value

GM-Mini type

迷你隔膜阀
Mini diaphragm valve



GM-Z type

直通隔膜阀
2-way diaphragm valve

