球阀
Ball valve

QFW-3T Series

三通无滞留球阀
Three-way non-retention ball valve

小扭矩，使用寿命长、全脱脂、密封弹性补偿、体积小、内部无滞留、外观接近于无死角、非常灵活功能组合、无需专业工具即可维护、经济、简单、可靠。

Small torque, long service life, full degreasing, sealing elastic compensation, small size, no internal retention, appearance close to no dead ends, very flexible function combination, maintenance without professional tools, economical, simple and reliable.




电动球阀
Electric ball valve



气动三通无滞留球阀可适配各种阀门控制器。
Pneumatic three-way non-retention ball valve can be adapted to various valve controllers.





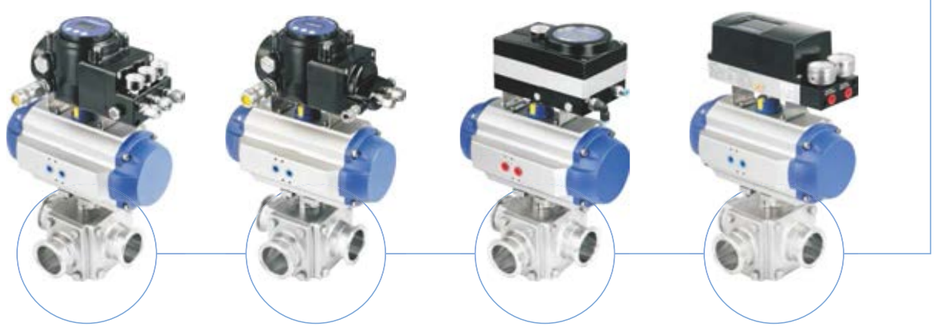

QF-GD Series

罐底球阀
Tank bottom ball valve

小扭矩，使用寿命长、全脱脂、密封弹性补偿、体积小、内部无滞留、非常灵活功能组合、无需专业工具即可维护、经济、简单、可靠。

Small torque, long service life, full degreasing, sealing elastic compensation, small size, no internal retention, very flexible function combination, maintenance without professional tools, economical, simple and reliable.

Size: 1"–4", DN25–DN100





主要应用容器设备上，用于放料、排泄。
Mainly used in container equipment, for discharge.



罐底球阀适配于、手动、气动、电动等驱动装置其包含定位器、控制单元、反馈器、位置传感器等。

Tank bottom ball valve is suitable for manual, pneumatic, electric and other driving devices, including positioner, control unit, feedback, position sensor, etc.

