
防混阀
Mixproof valve



工作原理图 Working principle diagram

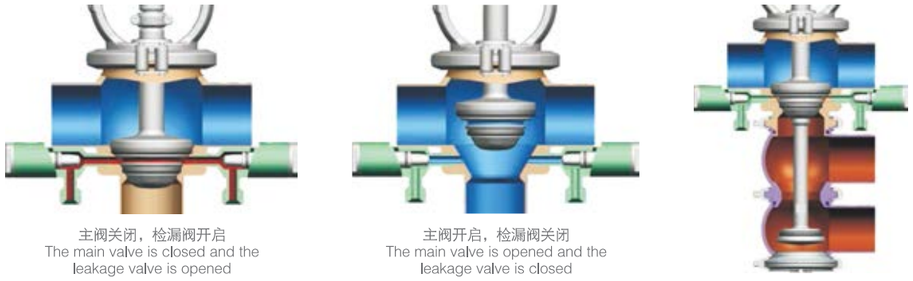

主阀关闭，检漏阀开启
The main valve is closed and the leakage valve is opened

主阀开启，检漏阀关闭
The main valve is opened and the leakage valve is closed

角座阀
Angle seat valve

JZ type

角座阀具有与通径相等的通量，极小流阻、启闭无噪音、无死角、可适用于真空环境、设计款型多样。

The angle seat valve has the same flux as the diameter, minimal flow resistance, no noise during opening and closing, no dead angle, It can be used in vacuum environment and has various designs.



技术特点

- 规格：1/2"–4",DN10–DN100
- 材质：316L/1.4404，ASME BPE 316L 1.4435 NB2 Fe≤0.5%
- 压力：真空~10bar(1.0 MPa)
- 温度：–20℃ 到 +150℃，取决密封于材质
- 密封：PTFE/TFM/PEEK
- 连接标准：DIN SMS ISO IDF RJT BS4825 ASME BPE 3A DIN11864 DIN11853
- 连接方式：螺纹、卡箍、焊接、法兰
- 驱动方式：手动、气动、电动
- 光洁度：Ra≤0.6 μ m; MP=Ra≤0.3 μ m; EP=Ra≤0.3 μ m
- 认证：FDA 177.2600; Glass II USP Glass VI Chapter 88; GB4806.11; EG VO/1935–2004; PED/97/23/EC;

Technical Features

- Specifications: 1/2"–4", DN10–DN100
- Material: 316L/1.4404, ASME BPE 316L 1.4435 NB2 Fe≤0.5%
- Pressure: vacuum to 10bar (1.0 MPa)
- Temperature: –20℃ to +150℃, Depending on the seal material
- Sealing: PTFE/TFM/PEEK
- Connection standard: DIN SMS ISO IDF RJT BS4825 ASME BPE 3A DIN11864 DIN11853
- Connection method: thread, clamp, welding, flange
- Drive mode: manual, pneumatic, electric
- Finish: Ra≤0.6 μ m; MP=Ra≤0.3 μ m; EP=Ra≤0.3 μ m
- Certification: FDA 177.2600; Glass II USP Glass VI Chapter 88; GB4806.11; EG VO/1935–2004; PED/97/23/EC;