
安全阀
Safety valve

非常灵活的阀体组合和连接方式 Very Flexible Valve Body Combination And Connection Method



不同连接方式 Different Connection Methods

1、卡箍	4、无菌法兰	1. Clamp	4. Aseptic flange
2、螺纹	5、法兰	2. Thread	5. Flange
3、螺母	6、管路连接	3. Nut	6. Pipeline connection

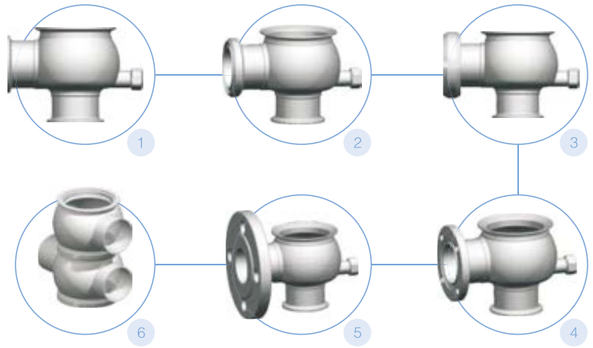


AQ-YL type

1、迷你安全阀
2、标准型安全阀
3、气动安全阀
4、手动快排式安全阀
5、气动安全阀+控制单元
6、视窗式安全阀
7、视窗式安全阀

1. Mini safety valve
2. Standard safety valve
3. Pneumatic safety valve
4. Manual quick-discharge safety valve
5. Pneumatic safety valve + control unit
6. Window type safety valve
7. Window type safety valve



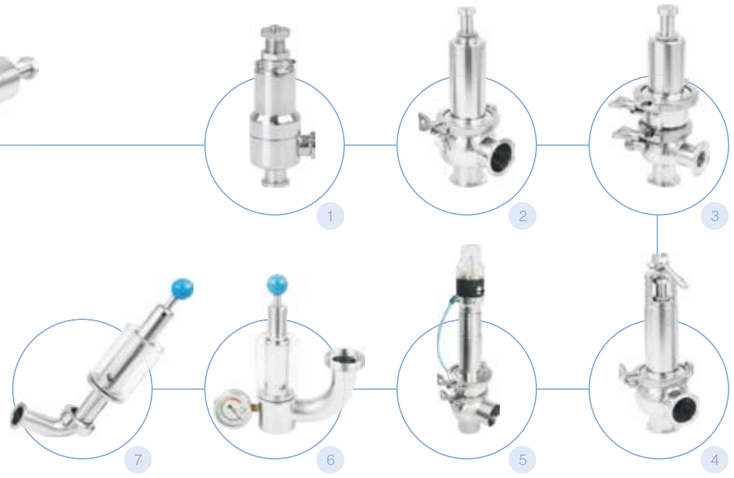

恒压阀
Constant pressure valve

AK-HY type

恒压阀分为进口管路压力稳定和出口管路压力稳定两种设计。我们设计严格按照美国-3-A-64-00的恒压阀具有无死角、无滞留、KV值曲线特性较好。

Constant pressure valves are divided into two designs: stable inlet pipeline pressure and stable outlet pipeline pressure. Our constant pressure valve designed strictly in accordance with the United States -3-A-64-00 has no dead ends, no retention, and better KV curve characteristics.







技术特点

- 规格：1/2"-3",DN10-DN65
- 材质：316L/1.4404，ASME BPE 316L 1.4435 NB2 Fe≤0.5%
- 压力：真空~10bar(1.0 Mpa)
- 温度：-20℃ 到 +150℃，取决密封于材质
- 密封：EPDM+PTFE
- 连接标准：DIN SMS ISO IDF RJT BS4825 ASME BPE 3A DIN11864 DIN11853
- 连接方式：螺纹、卡箍、焊接、法兰
- 光洁度：Ra≤0.6μm；MP=Ra≤0.3μm；EP=Ra≤0.3μm
- 认证：FDA 177.2600; 3A-64-00; Glass II USP Glass VI Chapter 88; GB4806.11; EG VO/1935-2004; PED/97/23/EC;

Technical Features

- Specification: 1/2"-3",DN10-DN65
- Material: 316L/1.4404, ASME BPE 316L 1.4435 NB2 Fe≤0.5%
- Pressure: Vacuum to 10bar (1.0 Mpa)
- Temperature: -20℃ to +150℃, Depending on the seal material
- Seal: EPDM+PTFE
- Connection standard: DIN SMS ISO IDF RJT BS4825 ASME BPE 3A DIN11864 DIN11853
- Connection method: Thread, clamp, welding, flange
- Finish: Ra≤0.6μm; MP=Ra≤0.3μm; EP=Ra≤0.3μm
- Certification: FDA 177.2600; 3A-64-00; Glass II USP Glass VI Chapter 88; GB4806.11; EG VO/1935-2004; PED/97/23/EC.