
止回阀
Check valve



Y型止回阀是一款全通径、无阻流、水平、垂直安装无滞留、无噪音止回阀。
规格：1"–4"，DN25–DN100
材质：SS104/316L
浮球：EPDM/SILICON/NBR/TPFE
压力：100bar
温度：–20℃到150℃

Y–type Check valve is a full diameter, open flow, horizontal and vertical installation of no retention, no noise check valve.
Specification: 1"–4", DN25–DN100
Material: SS104/316L
Float: EPDM/SILICON/NBR/TPFE
Pressure: 100bar
Temperature: –20℃ to 150 ℃



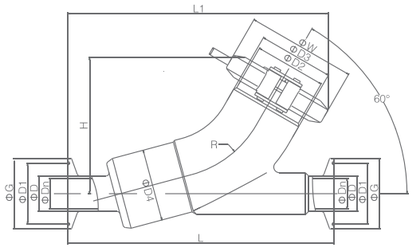


INCH


SIZE	D	Dn	D1	D2	D3	D4	W	G	L	L1	H	R
1"	25.4	22.1	43.5	50.8	53.5	51.5	78	50.5	200	185.9	97.3	76.2
1.5"	38.1	34.8	43.5	50.8	53.5	51.5	78	50.5	180	165.9	90.9	76.2
2"	50.8	47.5	56.5	76.2	80	76.2	103	64	250	235.1	132.2	114.3
2.5"	63.5	59.5	70.5	101.6	104	101.6	136	77.5	330	310	164.7	152.4
3"	76.2	72.2	83.5	101.6	104	101.6	136	91	310	285	158.4	152.4

灌装阀
Filling valve

流量切换式隔膜灌装阀
Flow switching diaphragm filling valve








是一款流量可切换、可调节、无菌、无死角、无滞留的隔膜式灌装阀。
规格：1/4"–3/4"，DN4–DN15
气缸直径 (D)：38 和 52mm
压力：≤ 3bar
材质：304/1.4301,316L/1.4404
温度：–20℃~130℃
膜片：EPDM/FKM/ EPDM+PTFE
寿命：≥1000万次
动作频率：≥5次/S
阀体结构：直通、三通

It is a diaphragm–type filling valve with flow switchable, adjustable, sterile, no dead ends, and no retention.
Specification: 1/4"–3/4", DN4–DN15
Cylinder diameter (D): 38 and 52mm
Pressure: ≤ 3bar
Material: 304/1.4301, 316L/1.4404
Temperature: –20℃~130℃
Diaphragm: EPDM/FKM/ EPDM+PTFE
Life: ≥10 million times
Action frequency: ≥5 times/S
Valve body structure: 2–way, three–way

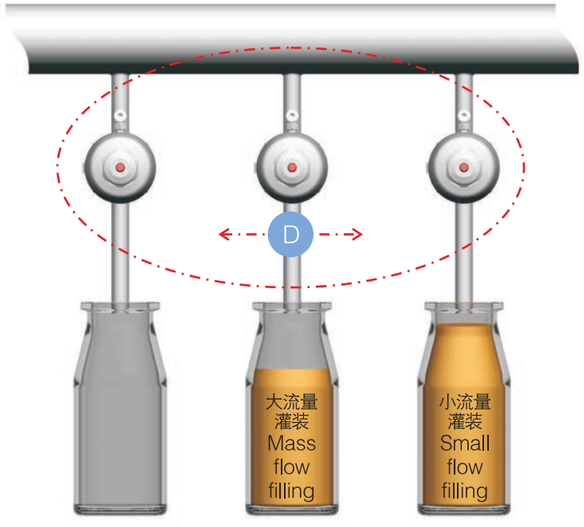

一个阀门可实现瞬间切换流量灌装
One valve can switch flow filling instantly