
清洗技术
Cleaning technology




喷射器性能曲线图 Injector performance graph

压力/流量曲线图 Pressure/flow graph

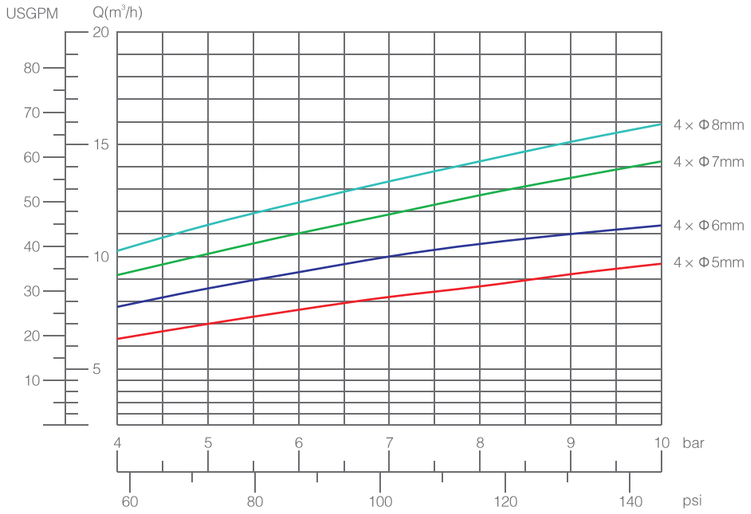

注意：上面图表适用于， 介质：水(20℃)。Note: The above chart applies to, medium: water (20℃).

清洗/喷射直径 Cleaning / Jet diameter

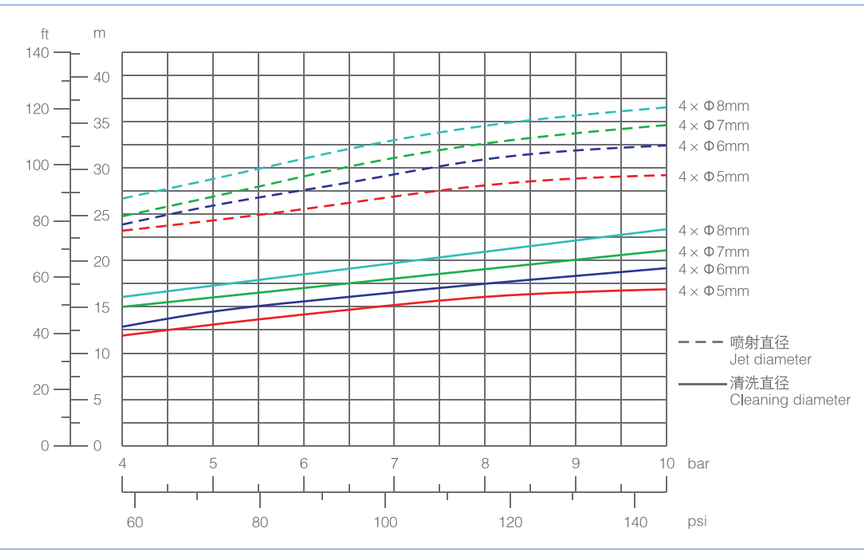

注意：上面图表适用于， 介质：水(20℃)。Note: The above chart applies to, medium: water (20℃).

新一代清洗技术：
–液体损耗下降30%
–噪音下降50%
–寿命提升2倍
–更加洁净

New generation cleaning technology:
–30% reduction in fluid loss
–Noise reduction by 50%
–Life span is increased by 2 times
–Cleaner

旋转式清洗球
Rotary cleaning ball

●球体尺寸：35mm、50mm、65mm、75mm
●接口尺寸：1/2"–2.5"，DN10–DN65
●连接方式：焊接、卡箍、螺纹、螺母、插销等
●工作压力：≤ 4bar
●工作温度：–10℃至130℃
●材质：316L/1.4404 PEEK

●Sphere size: 35mm, 50mm, 65mm, 75mm
●Interface size: 1/2"–2.5", DN10–DN65
●Connection method: weld, clamp, thread, nut, bolt, etc.
●Working pressure: ≤ 4bar
●Working temperature: –10℃ to 130℃
●Material: 316L/1.4404 PEEK



DJ–QX–XZ type

东正制造清洗球至今已有20多年经验，我们深知市场有非常多的清洗球产品，但普遍存在噪音大、清洗效果差、液体消耗大、清洗直径小、使用寿命短、清洗旋转不稳定等缺点。东正结合自身的经验和技术团队的努力对旋转式清洗球进行了系统性技术升级，升级后的产品具有更低噪音、更小流量消耗、更长使用寿命、更短清洗时间、清洗效果更加洁净等技术优势。

DONJOY has more than 20 years of experience in manufacturing cleaning balls. We know that there are many cleaning ball products in the market, but they are generally noisy, poor cleaning effect, large liquid consumption, small cleaning diameter, short service life, and unstable cleaning rotation and other shortcomings. Dongzheng combined its own experience and the efforts of the technical team to systematically upgrade the rotary cleaning ball. The upgraded product with lower noise, smaller flow consumption, longer service life, shorter cleaning time, and better cleaning effect.

清洗角度可选
Optional cleaning angle

清洗角度可为各种工艺需求或降低清洗液体消耗量而设计。也可为满足某种工艺喷洒液体需求。

360° 完全覆盖清洗
180° 部分覆盖清洗
270° 大部分覆盖清洗

360° Full coverage cleaning
180° Partial coverage cleaning
270° Mostly covered cleaning

The cleaning angle can be designed for various process requirements or to reduce the consumption of cleaning liquid. It can also meet the needs of spraying liquid for certain processes.

