
旋转清洗球(双卡箍式)-加长型
Rotary cleaning ball (double clamp type)- Extended type



Q	规格 Specification	D	T	TD	2Bar压力Pressure		
					喷射半径 Injection radius(N)	清洗半径 Cleaning radius(M)	流量 Flow (M^3/H)
35	0.5"	12.7	25	77.5	2.1	0.7	2
	0.75"	19	25	77.5	2.4	0.8	2.3
50	0.5"	12.7	25	77.5	2.5	1.1	2.5
	0.75"	19	25	77.5	2.8	1.2	2.8
	1"	25.4	50.5	77.5	2.8	1.3	3.0
65	0.75"	19	25	77.5	3.0	2.2	6
	1"	25.4	50.5	77.5	3.4	2.5	6.5
	1.25"	31.8	50.5	77.5	3.5	2.6	7.0
75	1.25"	31.8	50.5	91	4.0	3.0	12
	1.5"	38.1	50.5	91	4.2	3.1	15
	2"	50.8	64	91	4.5	3.2	16


固定式清洗球
Fixed cleaning ball

DJ-QX-GD type

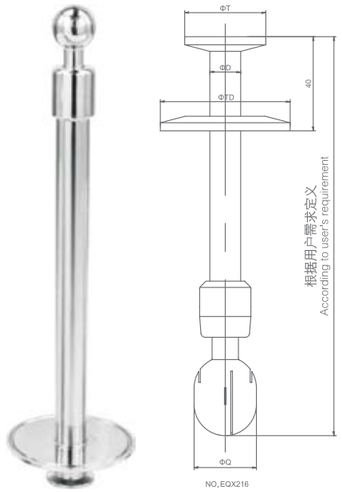

- ●球体尺寸：22mm、28mm、45mm、65mm
- ●接口尺寸：1/2"-2"，DN10-DN50
- ●连接方式：焊接、卡箍、螺纹、螺母、插销等
- ●材质：316L/1.4404 PEEK

- ●Sphere size: 22mm, 28mm, 45mm, 65mm
- ●Interface size: 1/2"-2", DN10-DN50
- ●Connection method: welding, clamp, thread, nut, bolt, etc.
- ●Material: 316L/1.4404 PEEK

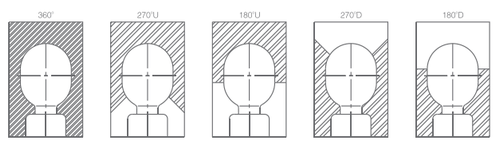

伸缩式固定清洗器
Retractable fixed cleaner

DJ-QXF type




技术特点 Technical Features

伸缩式固定清洗器主要解决因清洗球长期泡在介质中形成的死角而容易细菌繁殖而污染介质。该阀门开启时清洗，关闭时保持清洗球与介质不接触，从而避免了死角。


Retractable fixed cleaner mainly solves the dead angle formed by the cleaning ball soaking in the medium for a long time, which is easy to pollute the medium by breeding bacteria. The valve is cleaning when it is opened, and when it is closed, the cleaning ball is not in contact with the medium, thus avoiding the dead angle.

- ●规格：DN25-1".....4"-DN100
- ●连接方式：焊接、卡箍、罐底法兰
- ●材质：316L/1.4404
- ●工作温度：-20℃ 到 130℃


- ●Specification: DN25-1".....4"-DN100
- ●Connection method: welding, clamp, tank bottom flange
- ●Material: 316L/1.4404
- ●Working temperature: -20℃ to 130℃




卡箍连接
Clamp connection



对焊连接
Butt welding connection



法兰连接
Flange connection



侧面焊接连接
Side welding connection

