
视镜
Sight glass

法兰视镜
Flange sight glass

DJ-SJ-FL type

SIZE: DN25–DN300/1"–12"

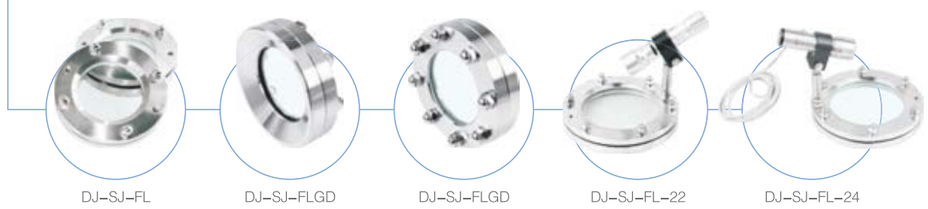

DJ–SJ–FL　DJ–SJ–FLGD　DJ–SJ–FLGD　DJ–SJ–FL–22　DJ–SJ–FL–24

Serial Number


DJ–SJ–FL 基本型法兰视镜	DJ–SJ–FL Basic type flange sight glass
DJ–SJ–FL–22 可充电锂电池法兰视镜灯	DJ–SJ–FL–22 flange sight glass with rechargeable lithium–ion battery
DJ–SJ–FL–24 DC24V法兰视镜灯	DJ–SJ–FL–24 flange sight glass with DC24V LED light

法兰视镜具有20bar压力等级。
The pressure rating of flange sight glass is 20bar.

四通视镜
Four-way sight glass

DJ-SJ-ST type

SIZE: DN25–DN100/1"–4"

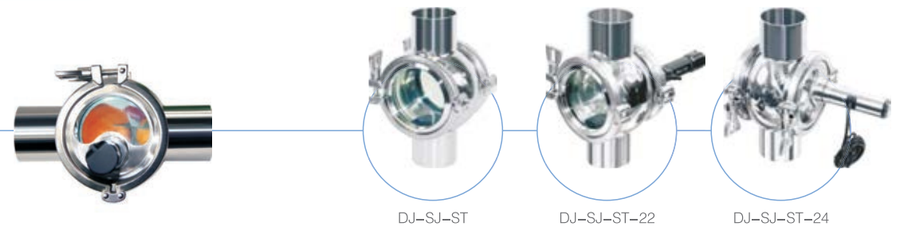

DJ–SJ–ST　DJ–SJ–ST–22　DJ–SJ–ST–24

Serial Number

DJ–SJ–ST 基本型四通视镜	DJ–SJ–ST Basic type four way sight glass
DJ–SJ–ST–22 可充电锂电池四通视镜灯	DJ–SJ–ST–22 4–way sight glass with rechargeable lithium–ion battery
DJ–SJ–ST–24 DC24V四通视镜灯	DJ–SJ–ST–24 4–way sight glass with DC24V LED light

四通视镜具有无死角、无滞留。
The four way sight glass with no dead angle and no retention.

过滤器
Filter

GL- type

过滤器有多种设计方案：
管道过滤器：直通、Y型、L型，双联过滤器
微孔过滤器：单芯、多芯、双联过滤器
地面过滤排泄(地漏)

The filter has a variety of design options:
Pipeline filter: straight, Y type, L type, double filter
Microporous filter: single core, multi core, double filter
Ground filtration and drainage (floor drain)



地面过滤排泄(地漏)
Ground filtration and drainage (floor drain)

GL–DL Type



材质：304/316L
规格：1"–6",DN25–DN150
温度：–30℃~150℃

Material: 304/316L
Size: 1"–6", DN25–DN150
Temperature: –30℃ to 150℃

