三通截止阀
Three-way globe valve





三通截止阀是一款具有换向、比例混合、切断等功能阀门，特别适合应用在两种介质比例混合工艺使用。它与其他的三通阀门相比较有着良好曲线特性、更小体积、更高精度。

Three–way globe valve is a valve with reversing, proportional mixing, shut–off and other functions, especially suitable for application in the proportional mixing process of two media. Compared with other 3–way valves, it has good curve characteristics, smaller size and higher precision.

规格：1/2"–4", DN10–DN100
材质：SS304/316L
温度：–20℃到150℃
压力：真空–10bar

Size: 1/2"–4", DN10–DN100
Material: SS304/316L
Temperature: –20° C to 150° C
Pressure: vacuum – 10 bar




三通截止调节阀
Three-way globe control valve


阀门工作示意图 Valve working diagram








阀门开启 Valve open
A与B相通 Connect

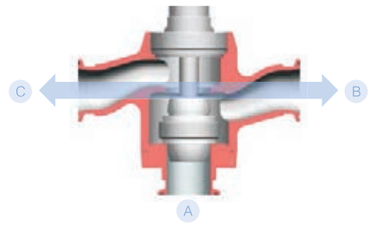


阀门关闭 Valve closed
B与C相通Connect，A关闭Close

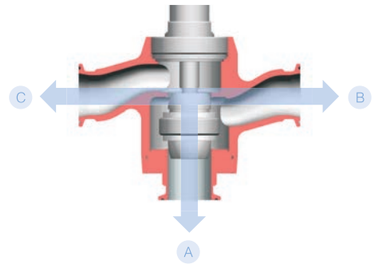

阀门比例开启 Valve proportional opening
A与B、C相通 Connect

三通截止调节阀曲线图 3 Way adjustable globe valve curve graph

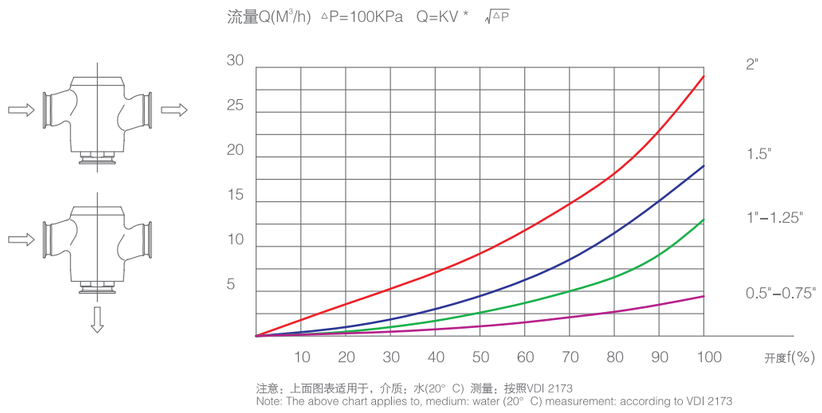

注意：上面图表适用于，介质：水(20° C) 测量：按照VDI 2173
Note: The above chart applies to, medium: water (20° C) measurement: according to VDI 2173